



## ISC-288

### Fiber Optic Splice Closure

## Features

- ◆ May be used for cut, uncut and taut sheath applications.
- ◆ May be used for all fiber optic cable.
- ◆ Sheath retention & central strength member fasten system included.
- ◆ Closure construction and lightweight plastic provides strength and resistance to chemical and U.V attack
- ◆ Installation and reentry with a minimum of tools
- ◆ All hardware are included
- ◆ Protection class: IP68
- ◆ RoHS compliance


## Application

- ◆ Underground, Aerial, Vault, Pole Mounting and Wall Mounting

## Specifications

### Mechanical Structure and Dimension

- ◆ Splice Tray : Tray 204B,Capacity:24F
- ◆ Spliced fiber storage capacity : 288F(single fusion)
- ◆ Cable ports :
  - 1 oval port : for 1 looped cable with max dia 30mm,
  - 6 round ports : Each port for 1 cable with max dia 30mm or each port for 8 drop cable with max dia 6mm
- ◆ Dimension : 488 x 285 (mm)

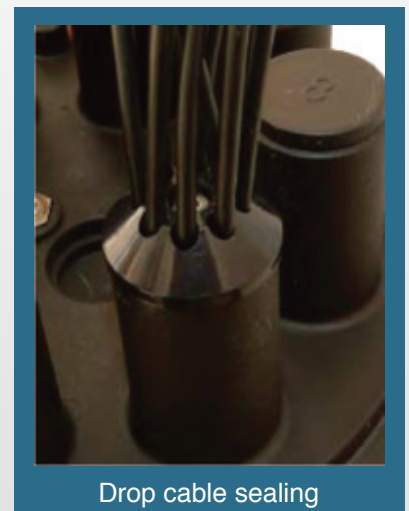

Drop cable sealing